**Technical Data** 



Cut Sheet: Short Rubber Curb

## MESys Solar


Weight: 26 lbs

8 Airport Road Bethel, Maine 04217


Phone: 207-824-6749 Fax: 207-824-4816

info@maineenergysystems.com

MESysSolar.com

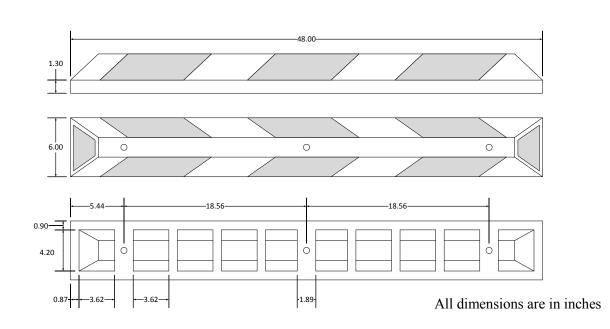

Density	0.6 oz / cu in	(ASTM C642)
Durometer Hardness	65A <u>+</u> 7	(ASTM D2240)
Tensile Strength * (* main structural areas)	Minimum 210 psi	(ASTM D412)
Compression Deformation	10% at 70 psi, 68°F	(ASTM D575)
Brittleness at Low Temperature:	-40°F	(ASTM D746)
Freeze and Thaw (when exposed to deicing chemicals)	No loss after 50 cycles	(ASTM C672)
Coefficient of thermal expansion	8 x 10-5 in / in / °F	(ASTM C531)
Weathering 70 hours at 158°F	$ \begin{array}{llllllllllllllllllllllllllllllllllll$	(ASTM D573)



## Operation

Avoids damage of roofing material and provides base for all CPC collector mounting equipment .

Made of 100% Recycled Rubber

Part #: 88-2071